


LK501 manual v2.1

Voltage: DC 12V±10%

Function: Receive the output pulse signal from coin selector, and control output relays. The number of the currency and the time of relay suck can be set .

Product pictures and interface specifications:

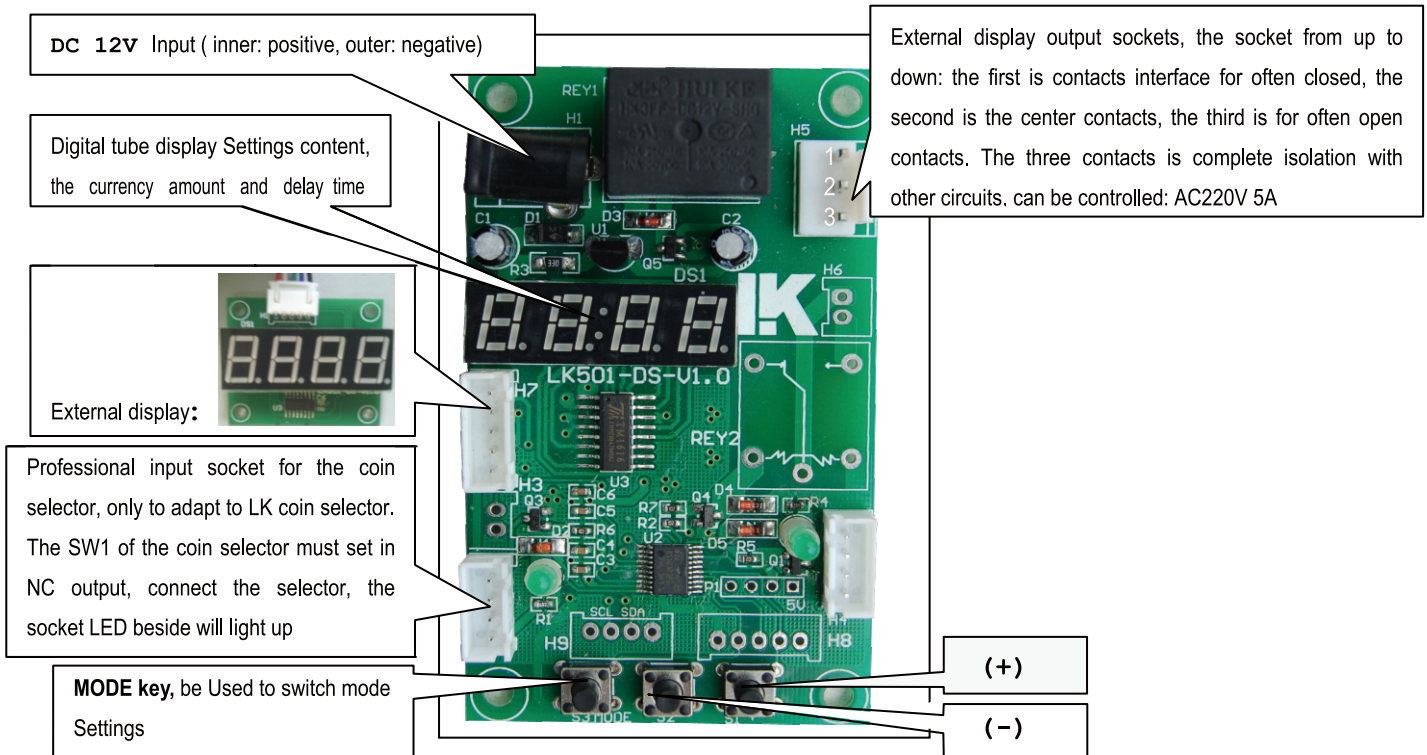

Setting method:

Put through power supply, digital tube first show 0, stand for in the state to accept currency. In this model, after that received money the digital tube will show the number of the quantities.

If the sums meets the quantity, will be connected to opening output point, disconnect output closing point, and then based on the set, minutes and seconds begin to count down, If this time setting is equal to or greater than 1 hour, digital tube display from left to right the first two for hours, the last two for minutes. If the countdown less than 1 hour, the first two show for minutes, the last show for seconds. The default setting is accept one coin, delay 3 seconds.

- Press the MODE for the 1st time, digital tube first (from left to right) show C, said the number of currency in setting, this time by add (+) or minus (-) key, can be set to receive 1 ~ 250 COINS.
- Press the MODE for the 2nd time, digital tube first show E, says the number of seconds set delay, this time according to add (+) or minus (-) key, can be set to delay time 0 ~ 60 seconds.
- Press the MODE for the 3rd time, digital tube first show F, said in the set delay scores, this time according to add (+) or minus (-) key, can be set to delay time 0 ~ 60 minutes.
- Press the MODE for the 4th time, digital tube first show H, in setting delay hours, at this time according to add (+) or minus (-) key, can be set to delay time 0 ~ 24 hours.
- Press the MODE for the 5th time, digital tube first show 5, among the two destroy, and the fourth display 1 or 0. Set up automatic reset mode, when set to 1 (only in the continuous accept currency mode), the number of coins is not up to the default, if in 1 minute not continue to get coin, the system will automatically reset the coin number to zero (please careful with this function). When set to 0, is not to be automatic reset.
- Press the MODE for the 6th time, digital tube first show 6, the two in the middle destroy, and the fourth display 1 or 0, in setting the currency mode. When set to 1, it can receive money, when the coin selector setting enough number, the equipment begins running, the coin selector will accept money, such as the setting enough number again currency, the operation time will be accumulate up. When set to 0, the equipment begin running, will refuse to accept coins
- Press the MODE for the 7th time, digital tube display the total number of currency. When more than 10000, digital tube will section shows, with a bar beginning (there are 4 flash numbers, the first flash number display a bar in the middle) is the high data and after the flash number is low data. In the currency state press the reduced (-) key long for 2 seconds, can be cleared the data.
- Press the MODE for the 8th time, digital tube display 4 0's, representative to accept money back to the state. At this time the content of the above set are automatically saved, power off and on again when it don't need to be reset. In the above 7 modes, the coin selector don't work, if in the setting state, the coin selector will refund money and the coin will exit from mouth to exit.